

Human-Robot Interaction

Module 2: How a robot works

Lecture 2: The components, structure, and operation of a robot: actuators, software, limitations of robotics for HRI

David Vernon
Carnegie Mellon University Africa

www.vernon.eu

Robot Components


- Robot hardware
- Sensors
- **Actuators**
- Software

We usually distinguish between actuators and effectors

Effectors are the mechanisms that the robot uses to interact physically with its environment: wheels, legs, arms, fingers, ...

Actuators are the mechanisms that physically move the effectors: motors, pneumatic actuators, hydraulic actuators

Bartneck et al. (2020) don't make this distinction

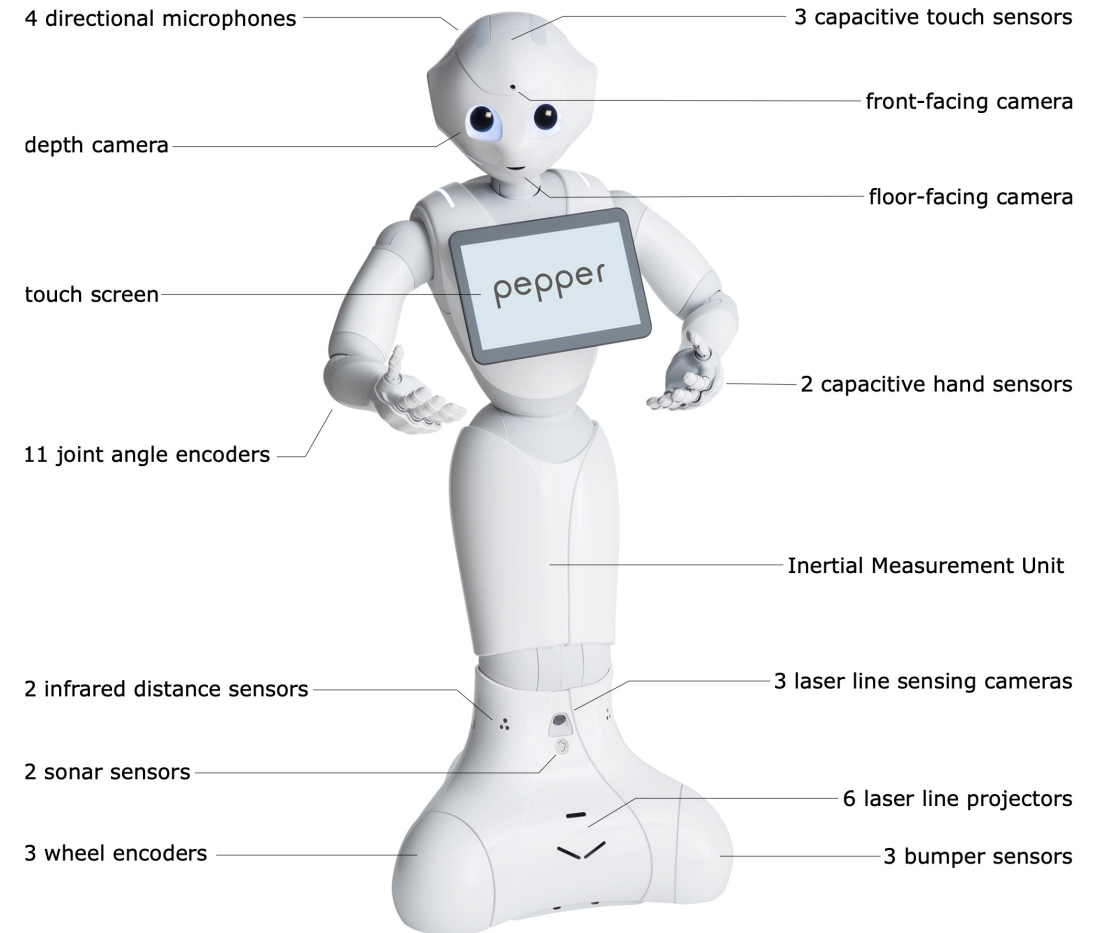

C. Bartneck, T. Belpaeme, F. Eyssel, T. Kanda, M. Keijsers, S. Šabanović, Human-Robot Interaction – An Introduction, Cambridge University Press, 2020

Definition

- An **actuator** converts electrical signals into physical movements
- A system with one actuator realizes **motion** either on
 - one **straight line** (linear actuators)
 - one **rotational axis** (rotary actuators)
- This means the system has **one degree of freedom**
- By combining multiple actuators, we can develop a robot that has motion with **multiple degrees of freedom** (e.g., for navigating on a 2D surface or gesturing in a 3D space)

Linear vs. Rotary Actuators


- **Linear** Actuators

The shaft of the linear actuators moves along its axis



- **Rotary** actuators

The shaft of the rotary actuator rotates about its axis



Types of Actuator

- Direct current (DC) motors
- Pneumatic actuators
- Hydraulic actuators
- Speakers



C. Bartneck, T. Belpaeme, F. Eyssel, T. Kanda, M. Keijsers, S. Šabanović, Human-Robot Interaction – An Introduction, Cambridge University Press, 2020

Direct Current (DC) Motors



DC Motor



DC Gear Motor



RC Servo motor



Stepper motor



BLDC Motor



Smart Servo motors



Harmonic drives



Linear electric actuator

<https://robocademy.com/2020/04/13/how-to-choose-an-actuator-for-your-robot/>

Direct Current (DC) Servo Motors

- Direct current (DC) **servo motors**
- Pneumatic actuators
- Hydraulic actuators
- Materials that are sensitive to light, heat, or chemicals can also be used as actuators



C. Bartneck, T. Belpaeme, F. Eyssel, T. Kanda, M. Keijsers, S. Šabanović, Human-Robot Interaction – An Introduction, Cambridge University Press, 2020

Direct Current (DC) Servo Motors

- DC motors rotate continuously in one direction
- Often, we need a motor that can move an effector to a particular **position**
- Motors that turn the shaft to a specific position are called **servo motors** (or **servos**, for short)

Used in the shoulder joint
of the Lynxmotion AL5D robot arm




<https://www.robotshop.com/en/hs-805bb-giant-scale-servo-motor.html>

Direct Current (DC) Servo Motors

Direct current (DC) **servo motor**:

- DC motor
- Gearbox for gear reduction
- Position sensor for the output shaft
- Control circuit
 - Direction of rotation
 - Angle of rotation (+/- 180 degrees)

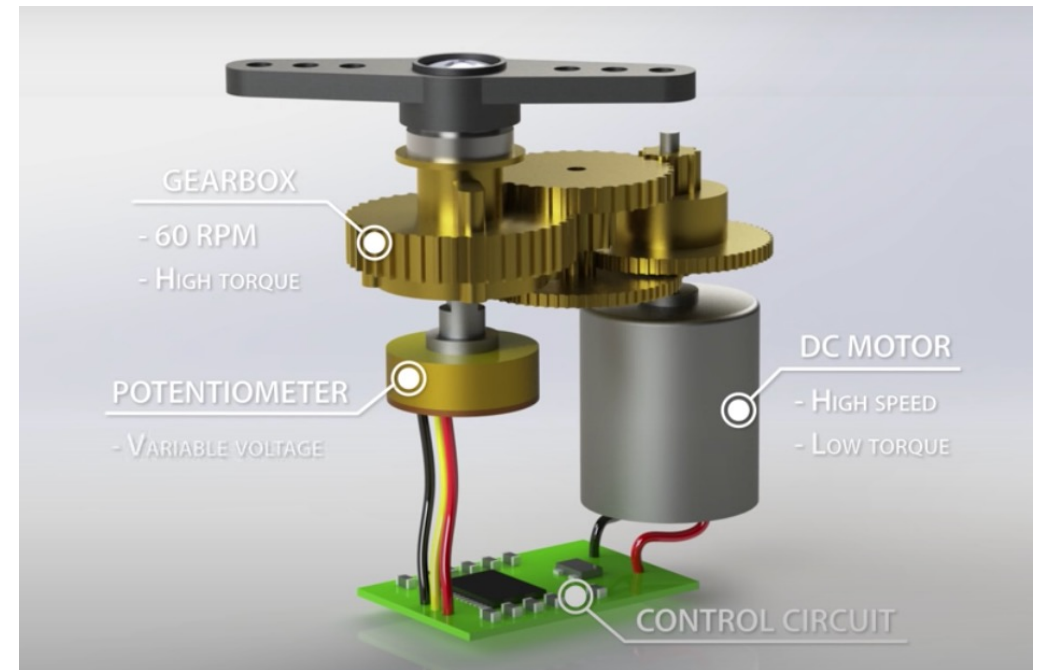

<https://robocademy.com/2020/04/13/how-to-choose-an-actuator-for-your-robot/>

Direct Current (DC) Servo Motors

Position sensor

- Potentiometer
- Encoder

which outputs the absolute or relative position of the motor's output shaft

Direct Current (DC) Servo Motors

Control circuit

- Typically uses a form of **pulse-width modulation (PWM)**
 - PWM uses on/off pulses to switch the motor on for a few milliseconds and then back off again
 - This is done several times per second (e.g. 50 Hz or 100 Hz)
 - The duration of the on phase against the off phase is known as the **duty cycle**
 - The duty cycle determines the speed at which the motor rotates
- The PWM signal controls the speed of the motor
- The controller sets the position of the motor through feedback control
 - The controller continuously reads the position of the motor (using the potentiometer or encoder)
 - Adjusts the motor's PWM and direction to reach or maintain a desired position


Direct Current (DC) Servo Motors

- For motors used in a robot's arms, legs, and head
 - the controller typically performs **position control** to rotate the motor toward a given joint angle
 - Also performs **velocity control** and **torque** (force x distance) **control**
- For motors used in wheels on a mobile base
 - the controller typically performs **velocity control** to rotate the motor at the required joint velocity

Robot Configurations




<https://store.irobot.com/default/create-programmable-programmable-robot-irobot-create-2/RC65099.html>

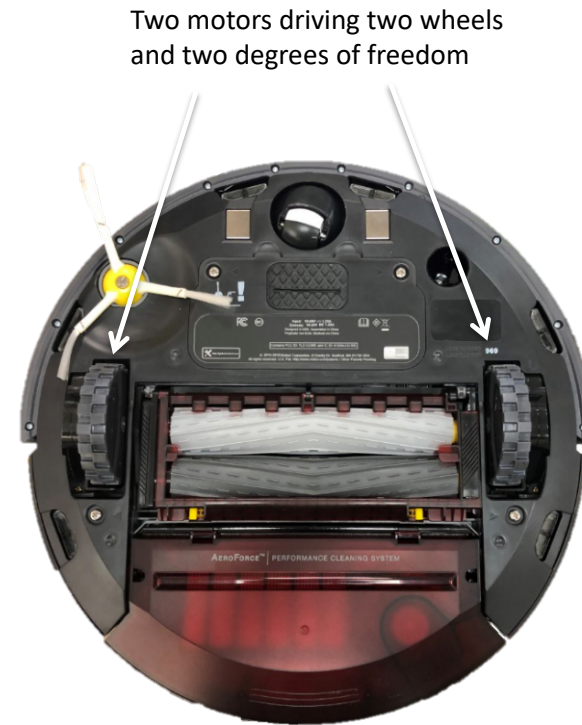

<https://homesupport.irobot.com/s/article/20711>

Robot Configurations

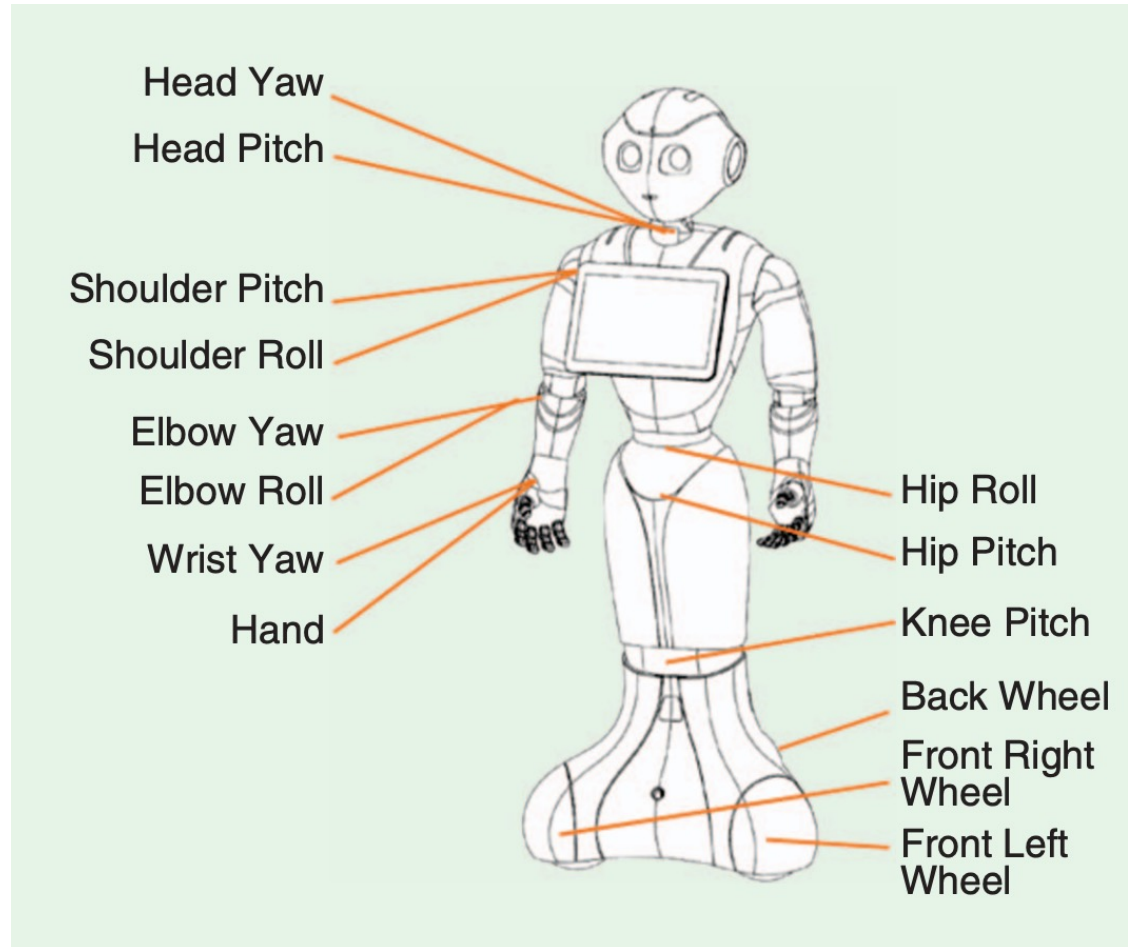


IEEE Robotics and Automation Magazine, September 2018, pp. 40-48



<https://robots.ieee.org/robots/pepper/>

Hand 9 DoF

Leg 6 DoF

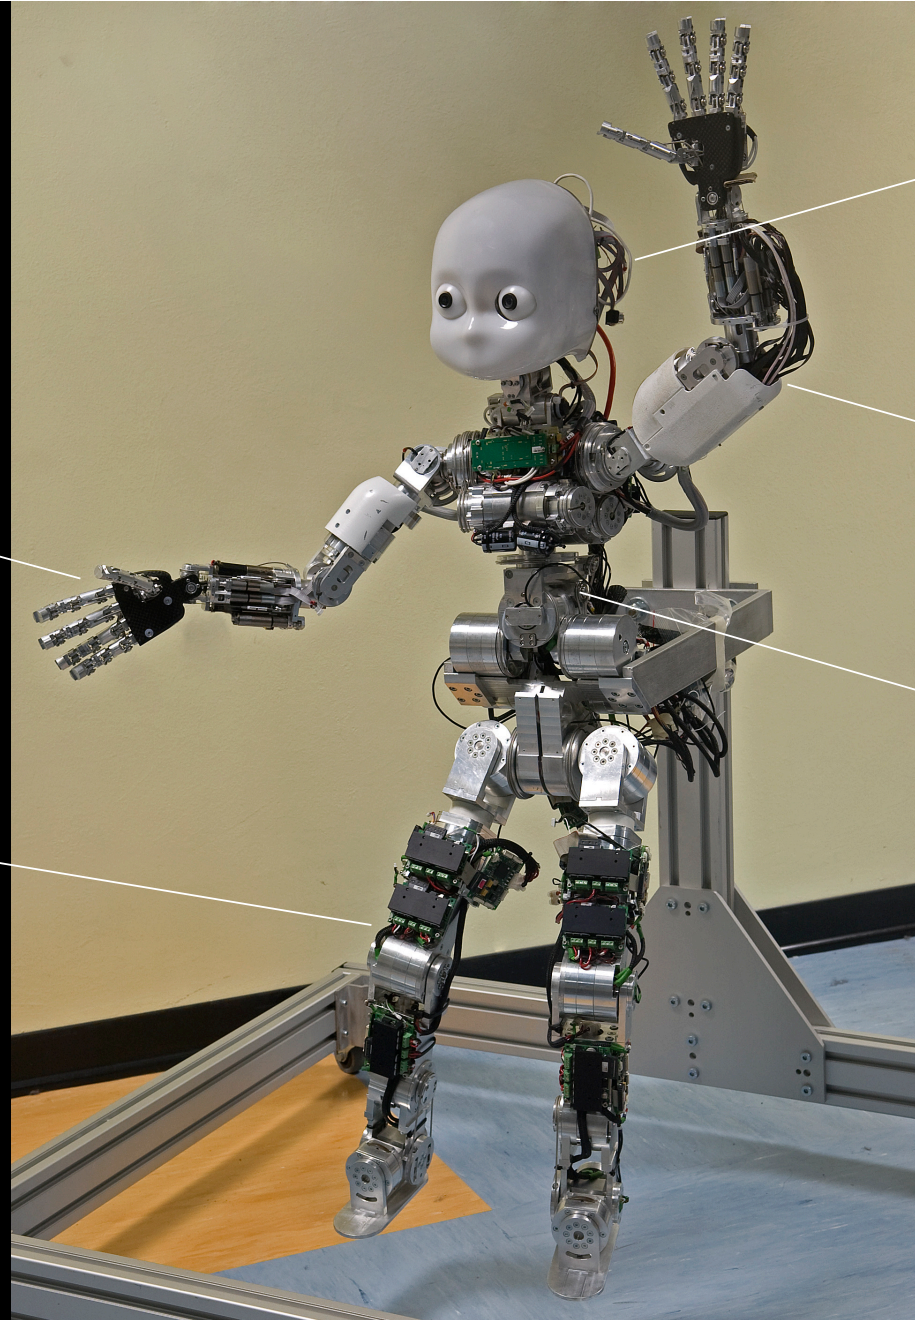

Head: 6 DoF

Arm 7 DoF

Waist 3 DoF


Robot Configurations



KUKA LBR iiwa

<https://robots.ieee.org/robots/lbriiwa>

Six degree of freedom industrial manipulator:
Three to position the wrist in 3D space
Three to orient the wrist/end effector in 3D space

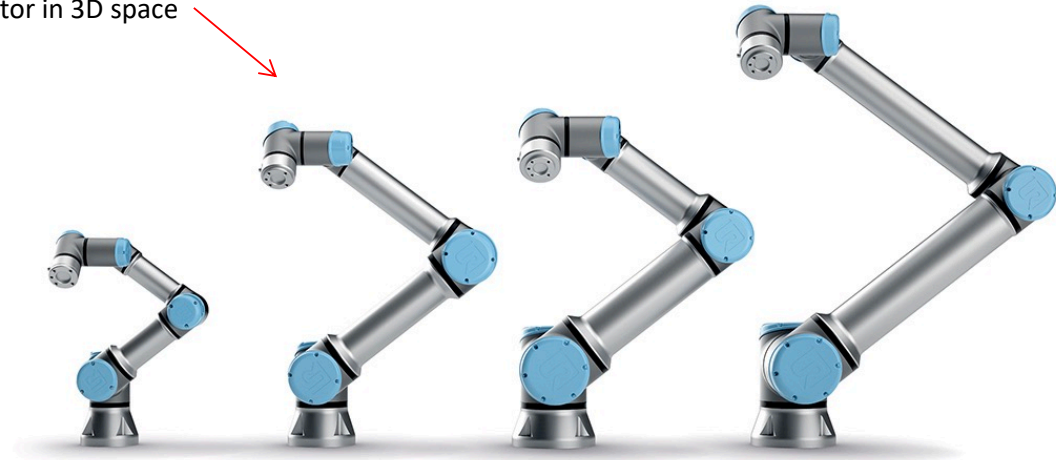

Universal Arms

<https://robots.ieee.org/robots/lbriiwa>

Robot Configurations

End-effector to grasp objects



1-DOF gripper

20-DOF dextrous hand



<https://robots.ieee.org/robots/shadow/>

Robot Configurations

Android robots can have many DOFs (e.g. 50 DOFs) and are able to control their facial expressions and other bodily movements



<https://robots.ieee.org/robots/geminoiddk/?gallery=photo4>



Video

<https://robots.ieee.org/robots/geminoiddk/?gallery=video1>

http://www.robotplatform.com/knowledge/actuators/types_of_actuators.html


Direct Current (DC) Servo Motors

When designing a robot, it is important to make sure the **motor specifications** match the **requirements**

- Wave its arms vs. lift a heavy payload
- How big the robot can be and still fit in well in its environment
- How quickly it needs to respond to stimuli
- Whether it has to run on a portable power bank or will always be plugged in

Pneumatic Actuator

- Compressed air creates a force that moves
 - Diaphragm
 - Piston
- Large & powerful
- Potentially dangerous
- Need to prevent leaks

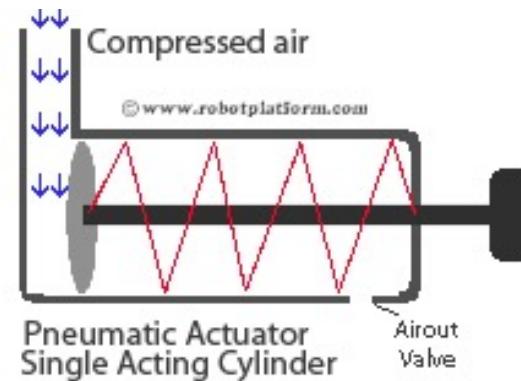


http://www.robotplatform.com/knowledge/actuators/types_of_actuators.html

Pneumatic Actuator

- Compressed air creates a force that moves
 - Diaphragm
 - Piston
- Large & powerful
- Potentially dangerous
- Need to prevent leaks



Pneumatic actuator

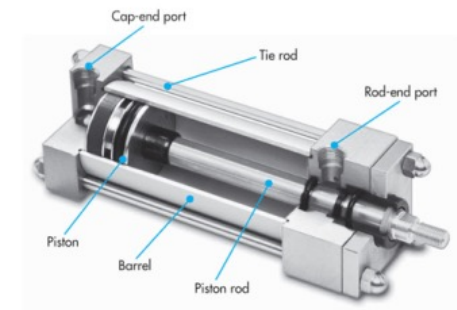

Section of pneumatic actuator

<https://robocademy.com/2020/04/13/how-to-choose-an-actuator-for-your-robot/>

Pneumatic Actuator

Often preferred for humanoid robots and android robots

- Need to gesticulate at humanlike velocity and acceleration
- The compressors can be quite loud
- This might disrupt the interaction experience




<https://robots.ieee.org/robots/robothespian/?gallery=photo2>




video

<https://robots.ieee.org/robots/robothespian/?gallery=video1>

RoboThespian
Model RT3
Engineered Arts Ltd Feb 2010

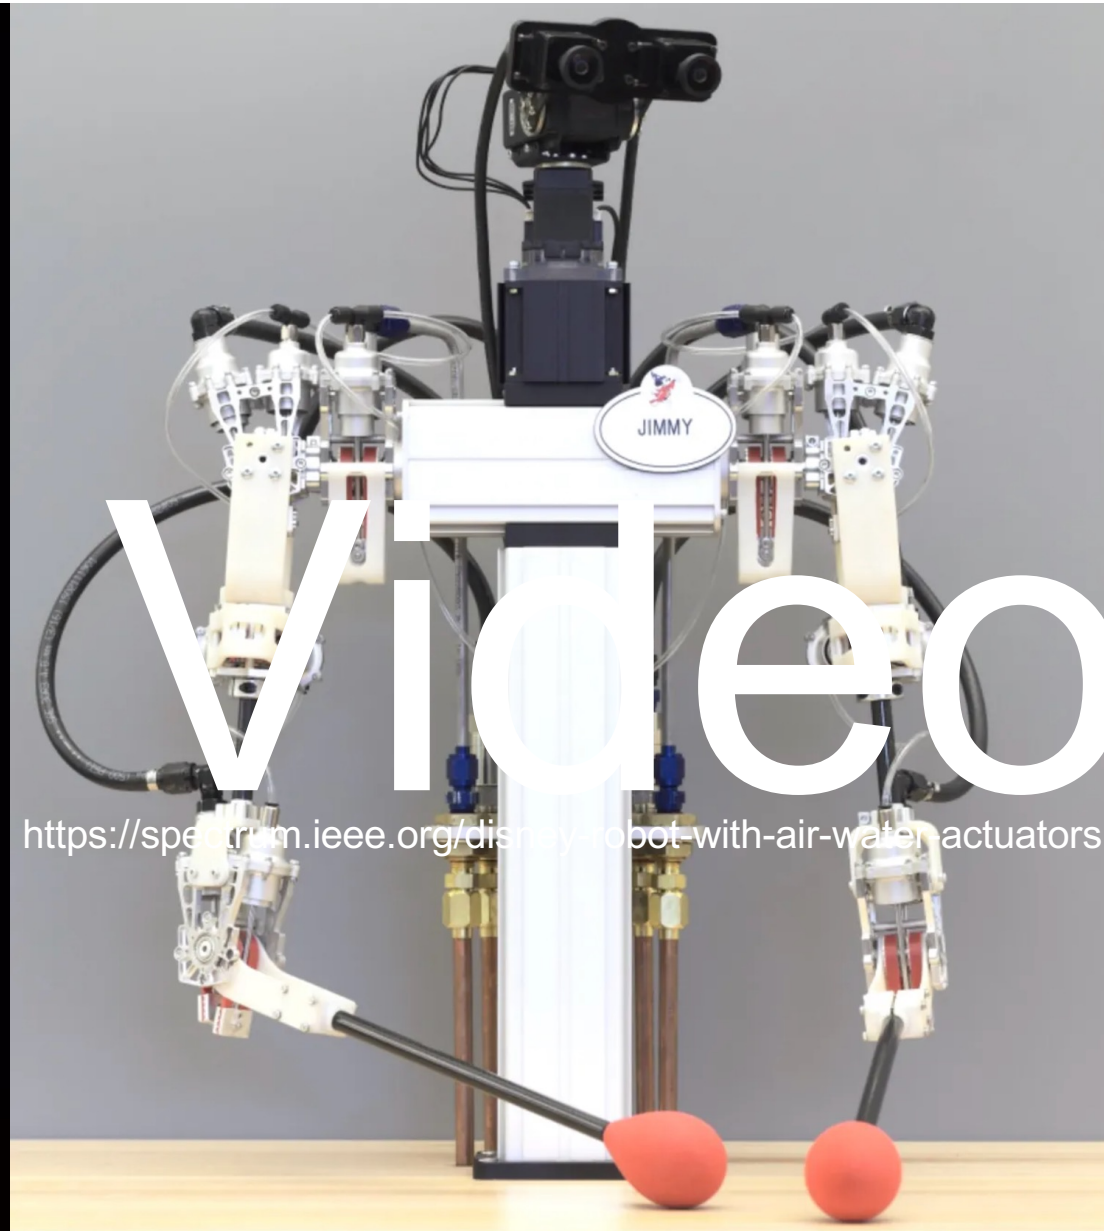

<https://spectrum.ieee.org/disney-robot-with-air-water-actuators>

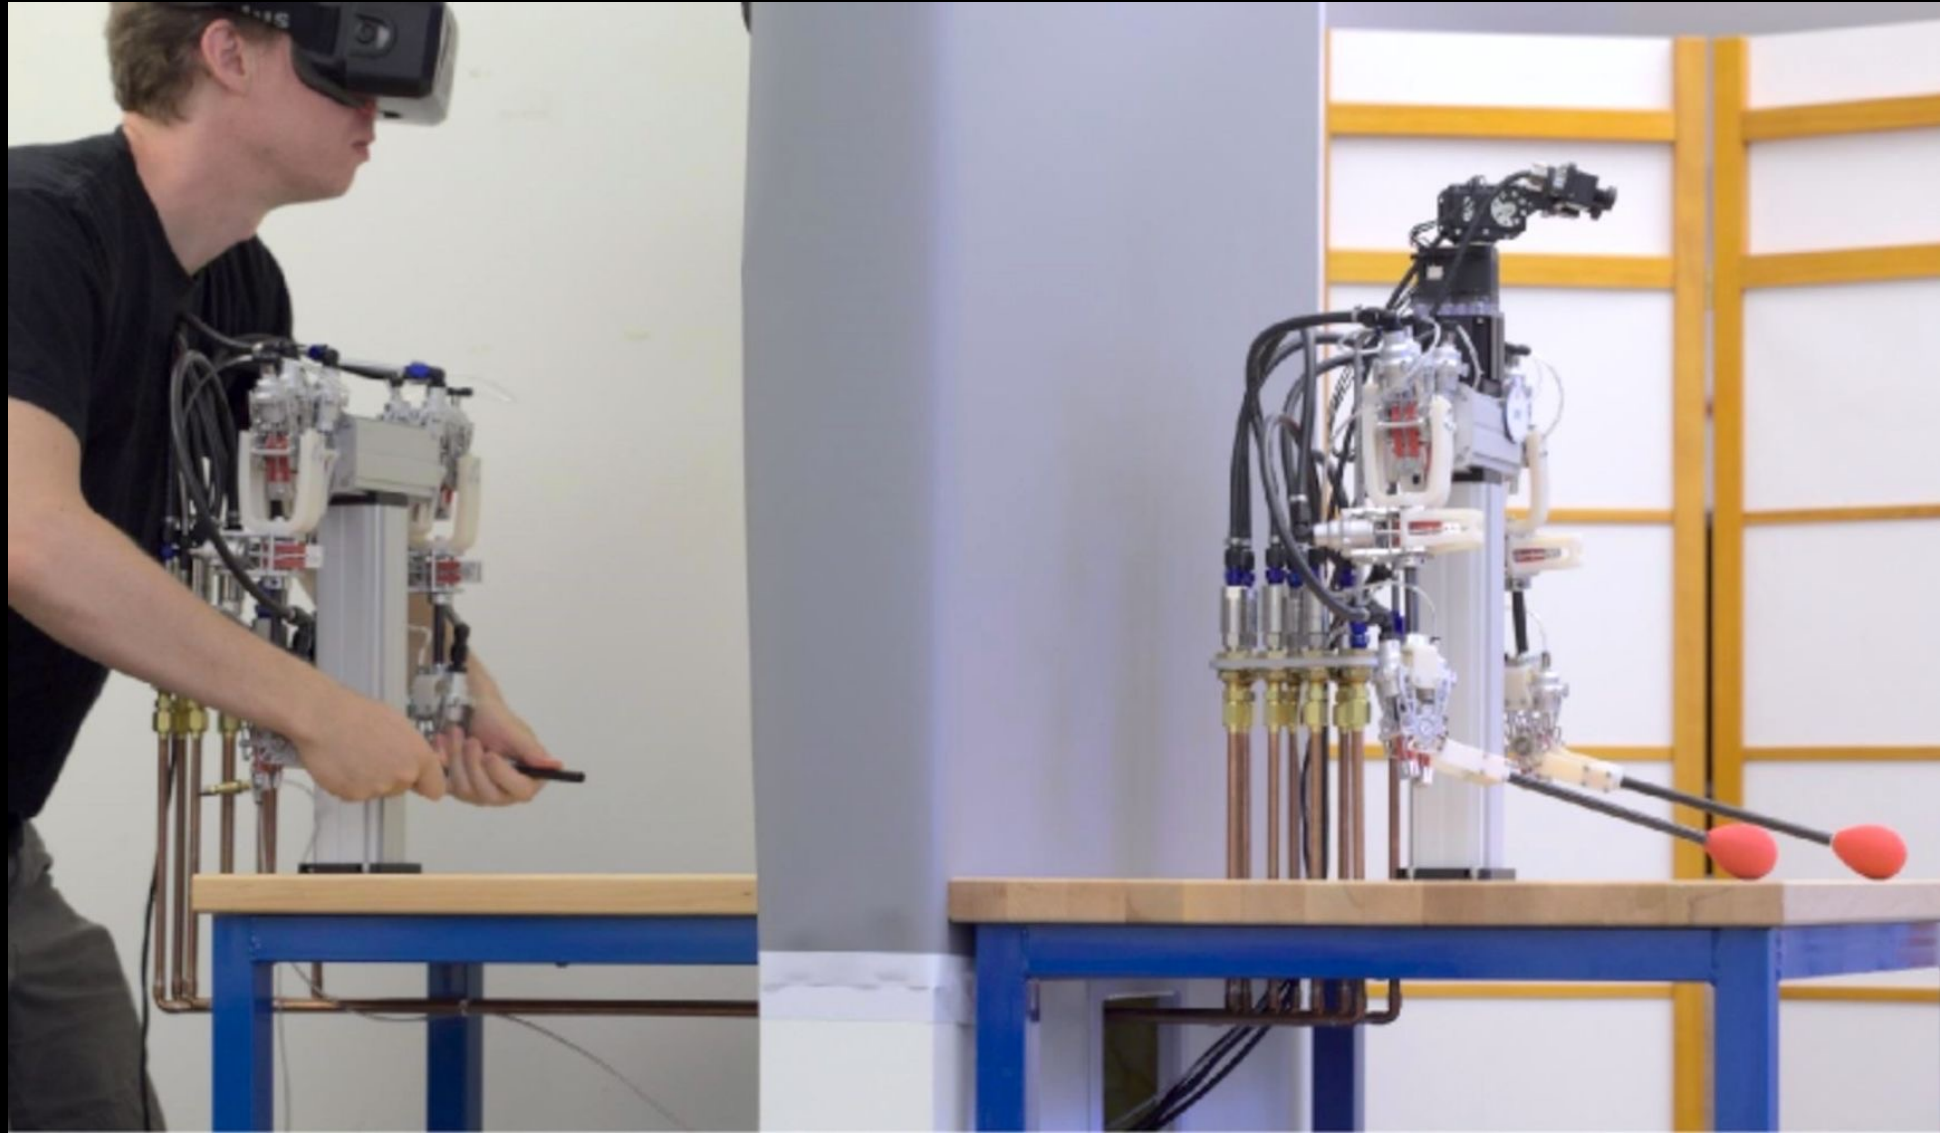


<https://spectrum.ieee.org/disney-robot-with-air-water-actuators>

Speakers

- Standard loudspeakers are used to generate sounds and speech
- Indispensable for HRI
- Speaker placement is an issue
 - **Relative height** from which the voices of a user and an agent interacting are projecting
 - Impacts the perception of **dominance** in the interaction

Robot Components

- Robot hardware
- Sensors
- Actuators
- Software

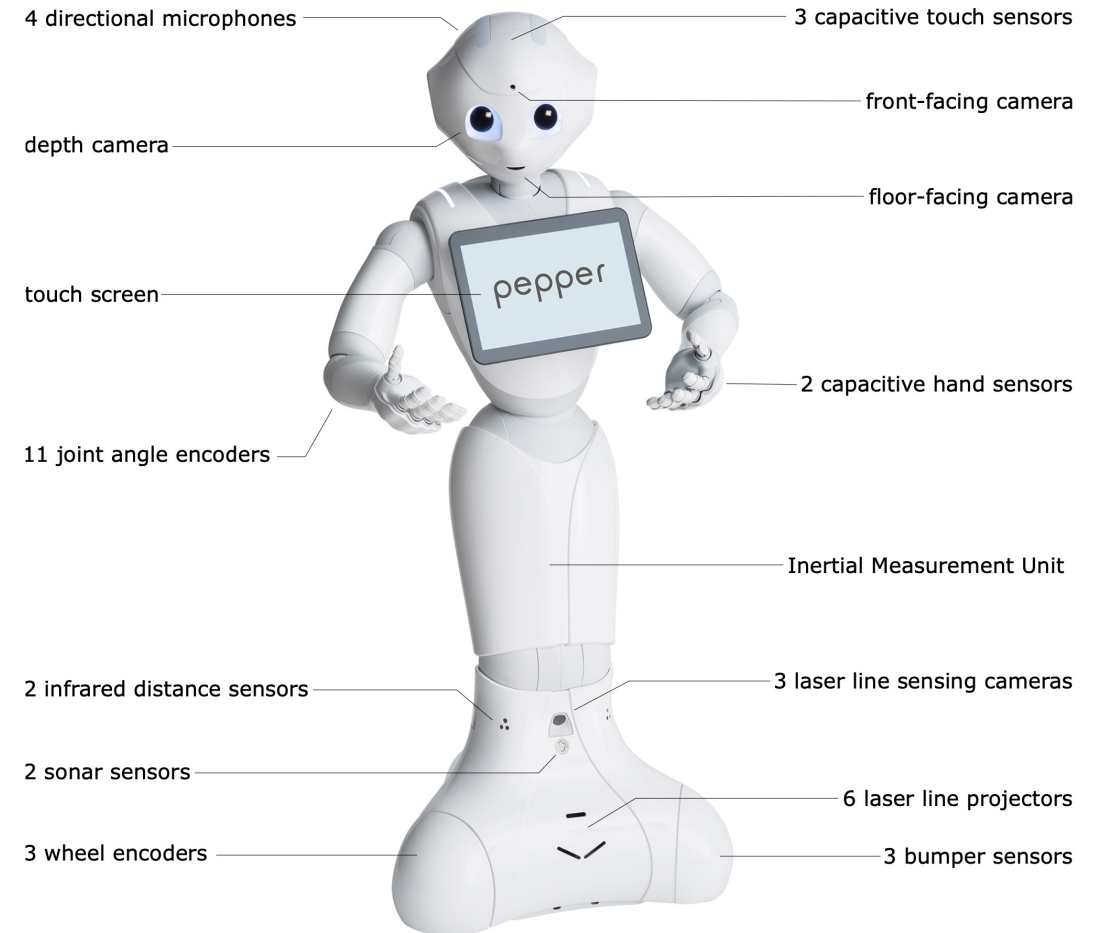

C. Bartneck, T. Belpaeme, F. Eyssel, T. Kanda, M. Keijsers, S. Šabanović, Human-Robot Interaction – An Introduction, Cambridge University Press, 2020

Software

All currently available robots are controlled by **software**

- One or more computers
- **On-board** or **remote**, possibly **cloud-based**
- Cloud-based services offer far more power
- But at the cost of requiring robust internet connectivity, not always guaranteed
- Time-critical and safety-critical processing are usually done on-board

Software

- A robot interfaces with a messy real world
- And needs to make sense of it in real time

"A robot is much more than computer with a body."

[Bartneck et al. 2020: 31]

Compare this with the following:

"A robot, in essence, is a computer with a body."

(Bartneck et al. 2020: 19)

Software


- The software needs to be organized
 - Modularized
 - Using a software architecture
- There are different architecture models
 - Each implement a different **control strategy**

Software Architecture Models

- Sense-plan-act / Deliberative / Hierarchical
- Reactive
- Behaviour-based

Software Architecture Models

- Sense-plan-act / Deliberative / Hierarchical
- Reactive
- Behaviour-based

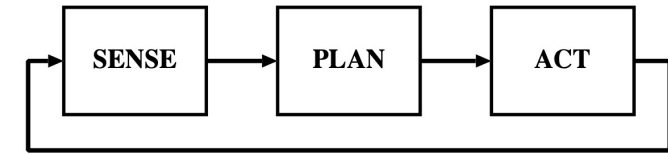

Input sensory data

Processed into abstract representations

Analyzed to plan the next action

Output the action motor commands

Software Architecture Models

- Sense-plan-act / Deliberative / Hierarchical
- **Reactive**
- Behaviour-based



Act first; think later


Multiple instances of Sense-Act couplings called **sensorimotor contingencies** or **behaviors**

Each behavior operates in parallel

Advantage: immediately respond to an external event


Software Architecture Models

- Sense-plan-act / Deliberative / Hierarchical
- Reactive
- Behaviour-based
 - Invoke mechanisms to mediate between which behaviors are active and which are not
 - For example, the **subsumption architecture** which organizes behaviors into hierarchies

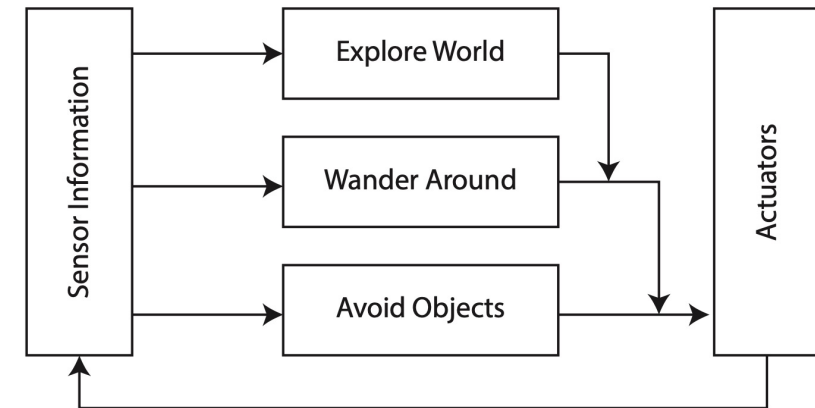

Software Architecture Models

- Sense-plan-act / Deliberative / Hierarchical
- Reactive
- Behaviour-based
 - While not having an explicit representation of the world, it can still behave in an "apparently" intelligent way
 - Cleaning robot: two behaviors in parallel
 1. Avoid walls
 2. Steer slightly to the right
 - The resulting, emergent, behavior is "wall-following"
 - The iRobot Roomba was developed with this in mind

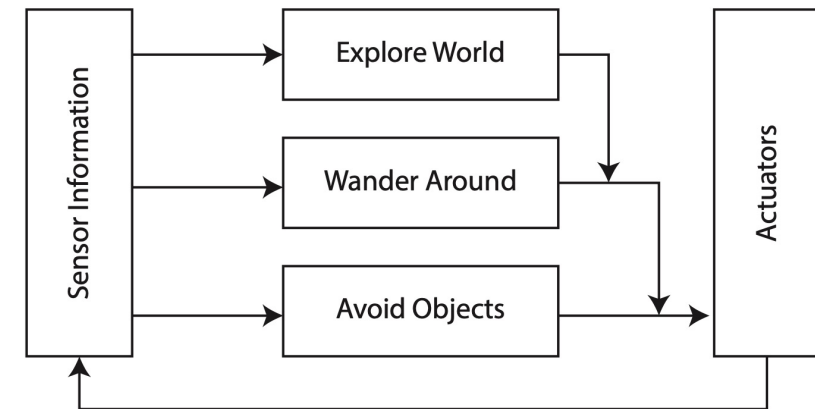

Software Architecture Models

- Sense-plan-act / Deliberative / Hierarchical
- Reactive
- Behaviour-based
- Hybrid of deliberative and reactive
 - HRI typically requires a middle ground between deliberative and reactive
 - A reactive control layer that responds quickly to sub-second social events
 - A deliberative layer, which formulates a coherent response to slower elements in the interaction, e.g. a conversation

Software-implementation Platform

Robot Operating System (ROS)

- Commonly used for robotics and HRI
- Provides a way for individual modules to communicate
- Provides libraries and tools for common robot abilities
 - Localization
 - Navigation
- Large community who share public software repositories

Machine Learning

Let a robot learn a skill rather than programming it explicitly. To do this, we need

- **Training data**
 - A large number of examples of what has to be learned (~1000 per instance)
 - Typically, manually annotated or labelled
- **Feature extraction**
 - A feature is a number that indicates the degree to which the data exhibits a particular characteristic (e.g. timbre, frequency, age, height, local contrast, color...)
 - Typically n features are assembled together in an **n -dimensional feature vector**
- **Machine learning algorithm**
 - Many options: supervised, unsupervised, reinforcement, for classification, regression, or policy
 - We want the learning algorithm to **generalize** (correctly handle unseen data) but not **overfit** (good performance on training data, poor performance on unseen data)

Machine Learning

Deep Learning

- Deep neural networks with a large number of layers
- Training requires significant computational power
 - Made possible by recent availability of graphic processing units (GPUs) & parallel processing
- Feature extraction is done automatically by the network: learning the features that are required
- Very large datasets required
 - e.g., 230 billion data points are used by Google to train its speech recognition network
 - Major problem for HRI because it is difficult to collect large amounts of data where humans and robots interact
- Lack of explainability is also an issue
 - Deep neural networks tend to be black boxes (but this is changing)
 - Impacts negatively on trustworthiness of the network

Computer Vision

- Important for HRI
 - Motion detection
 - Face detection
 - Face recognition (still a challenge, especially side-on views)
 - Gesture recognition
 - Skeleton tracking (for activity recognition), often using RGB-D cameras using, e.g. OpenPose
- Open libraries, e.g. OpenCV, make it easier to implement
- Sometimes implemented in the cloud, streaming the data to servers
- Significant progress through advances in deep learning
 - Recent advances in skeleton tracking using RGB cameras

Limitations of Robotics for HRI

General challenges

- System complexity: integration of many sub-systems is non-trivial
 - Natural language processing
 - Speech recognition
 - Social-signal processing
 - Face detection
 - Emotion classification
 - Sound-source localization
 - Action selection
 - Navigation

Limitations of Robotics for HRI

General challenges

- Significant gap between
 - The noisy, uncertain, analogue world of robotics and
 - The digital domain
- Learning
 - Deep learning can take days and weeks
 - Robots operate in real-time
 - Skill transfer from one task to another is still a major challenge

Limitations of Robotics for HRI

General challenges

- Robots and AI systems struggle with semantics
 - They don't truly understand what happens around them
 - They may exhibit the **appearance of intelligent behavior**, without being intelligent
 - Many such behaviors are pre-programmed and are not grounded
 - cf. Searle's Chinese Room: computers only process syntactic symbols that do not contain semantics
 - cf. McDermott: AI doesn't need to replicate human mechanisms of intelligence to be considered intelligent
 - **Continual shift in what people deem to constitute an artificially intelligent agent**

Limitations of Robotics for HRI

General challenges

- Researchers often fake the intelligence of a robot by applying the Wizard-of-Oz method
- "In the field of human-computer interaction, a Wizard of Oz experiment is a research experiment in which subjects interact with a computer system that subjects believe to be autonomous, but which is actually being operated or partially operated by an unseen human being"

https://en.wikipedia.org/wiki/Wizard_of_Oz_experiment



https://www.researchgate.net/publication/228830650_How_to_design_and_prototype_an_information_appliance_in_24_hours-Integrating_product_interface_design_processes

Limitations of Robotics for HRI

General challenges

- Researchers often fake the intelligence of a robot by applying the Wizard-of-Oz method
- "In the field of human–computer interaction, a Wizard of Oz experiment is a research experiment in which subjects interact with a computer system that subjects believe to be autonomous, but which is actually being operated or partially operated by an unseen human being"
https://en.wikipedia.org/wiki/Wizard_of_Oz_experiment
- The requirements of HRI often imply unrealistic expectations about what is feasible with current technology
- **Take-home message:** novice researchers and the general public need to be aware of the current limitations of robotics and AI

Reading

Bartneck, C., Belpaeme, T., Eyssel, F., Kanda, T., Keijsers, M., Sabanovic, S. (2020). Human-Robot Interaction - An Introduction, Cambridge University Press.

Chapter 3 – How a Robot Works, pp. 28-40